

# (12) UK Patent Application (19) GB (11) 2 352 589 (13) A

(43) Date of A Publication 31.01.2001

(21) Application No 0011694.7

(22) Date of Filing 15.05.2000

(30) Priority Data

(31) 11136040 (32) 17.05.1999 (33) JP

(71) Applicant(s)

NEC Corporation  
(Incorporated in Japan)  
7-1 Shiba 5-chome, Minato-ku, Tokyo 108-01, Japan

(72) Inventor(s)

Ryohei Sato

(74) Agent and/or Address for Service

Reddie & Grose  
16 Theobalds Road, LONDON, WC1X 8PL,  
United Kingdom

(51) INT CL<sup>7</sup>

H04N 5/44 17/04

(52) UK CL (Edition S )

H4L LEUF LEUG  
H4F FHC

(56) Documents Cited

DE 001973897 A


(58) Field of Search

UK CL (Edition R ) H4F FHC , H4L LESF LEUF  
INT CL<sup>7</sup> H04M 1/725 , H04N 1/42 5/44 5/94 17/04 ,  
H04Q 7/32  
On-Line - EPODOC, JAPIO, WPI

(54) Abstract Title

**Mobile terminal equipped with adaptor for image display and method for handling changes in connection line quality**

(57) A radio mobile terminal 520 is provided with an image information output unit 522 for outputting image information, a line quality monitoring unit 523 for monitoring line quality between radio base station device 510 and radio mobile terminal 520, a display method selector 524 for selecting an appropriate image display method for image display unit 540 according to the line quality, and a display method designator 525 for outputting the selected display method to an adaptor for image display 530. The adaptor for image display 530 is provided with an image display processor 531 for receiving the image information and displaying an image on the image display unit 540, and a display operation unit 532 for receiving instructions from the display method designator 525 and operating image display processor 531 to modify to an appropriate display. In the event of degradation of line quality the display method can be changed to a more appropriate method for use with the degraded signal. The display may be connected to the mobile terminal via a wireless link, in which case, a line quality monitoring unit 536 may also monitor the line quality between radio mobile terminal 520 and image display adapter 530. A display method selector 534 may then receive the output of the line quality monitoring unit 536. Instead of using the display method selector 524 in the terminal 520, the output of the line quality monitoring unit can be applied through a transmitter 526 and receiver 533 to the display method selector 534 in the adapter 530.

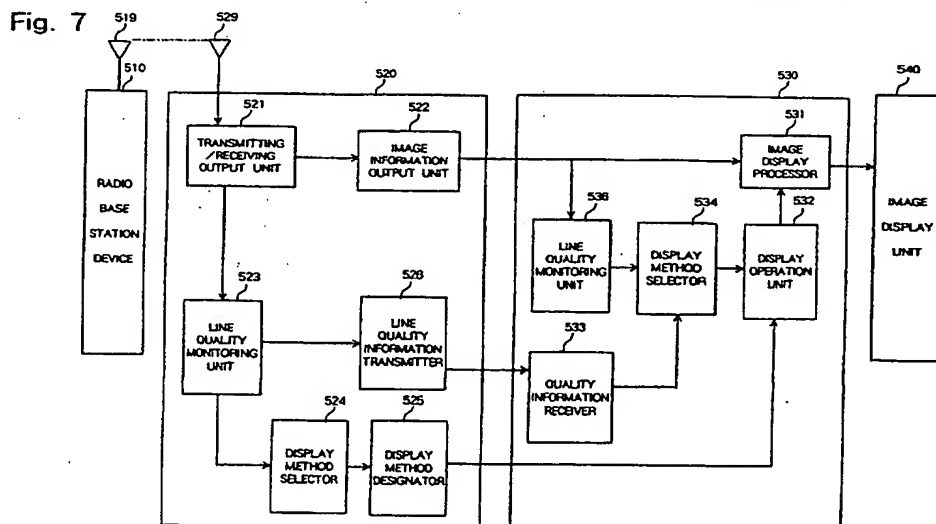

GB 2 352 589 A

Fig. 1

1/8

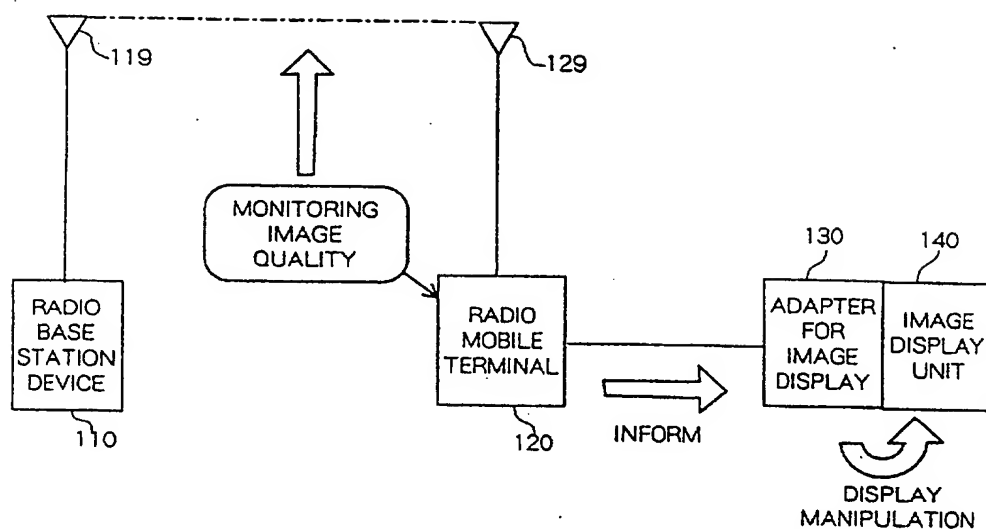
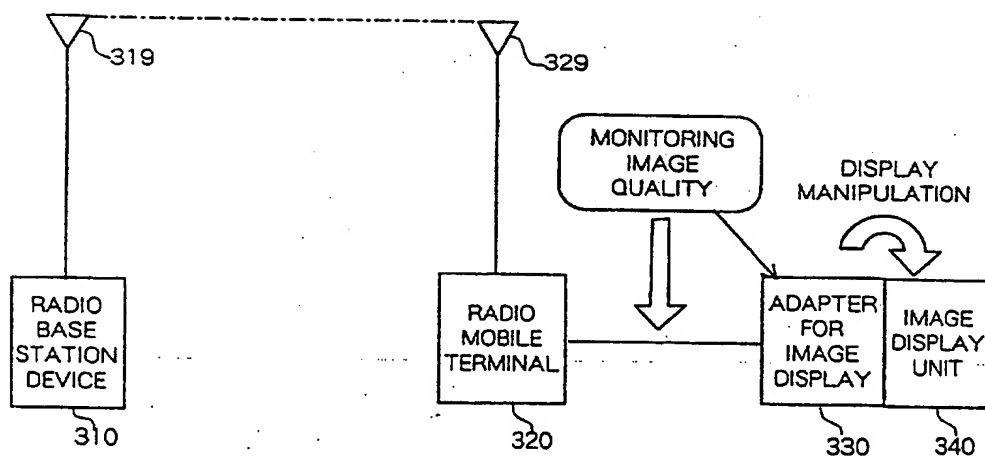


Fig. 2



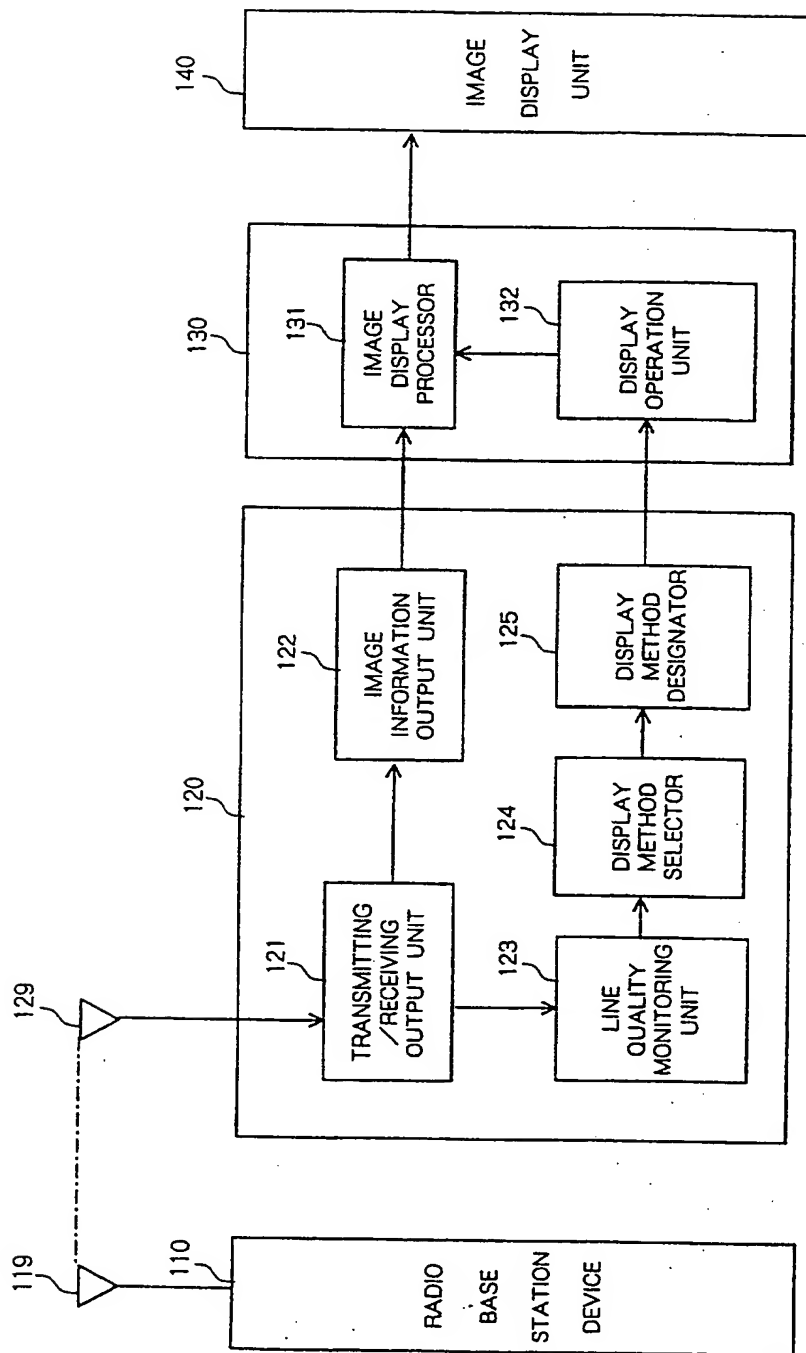


Fig. 3

Fig. 4

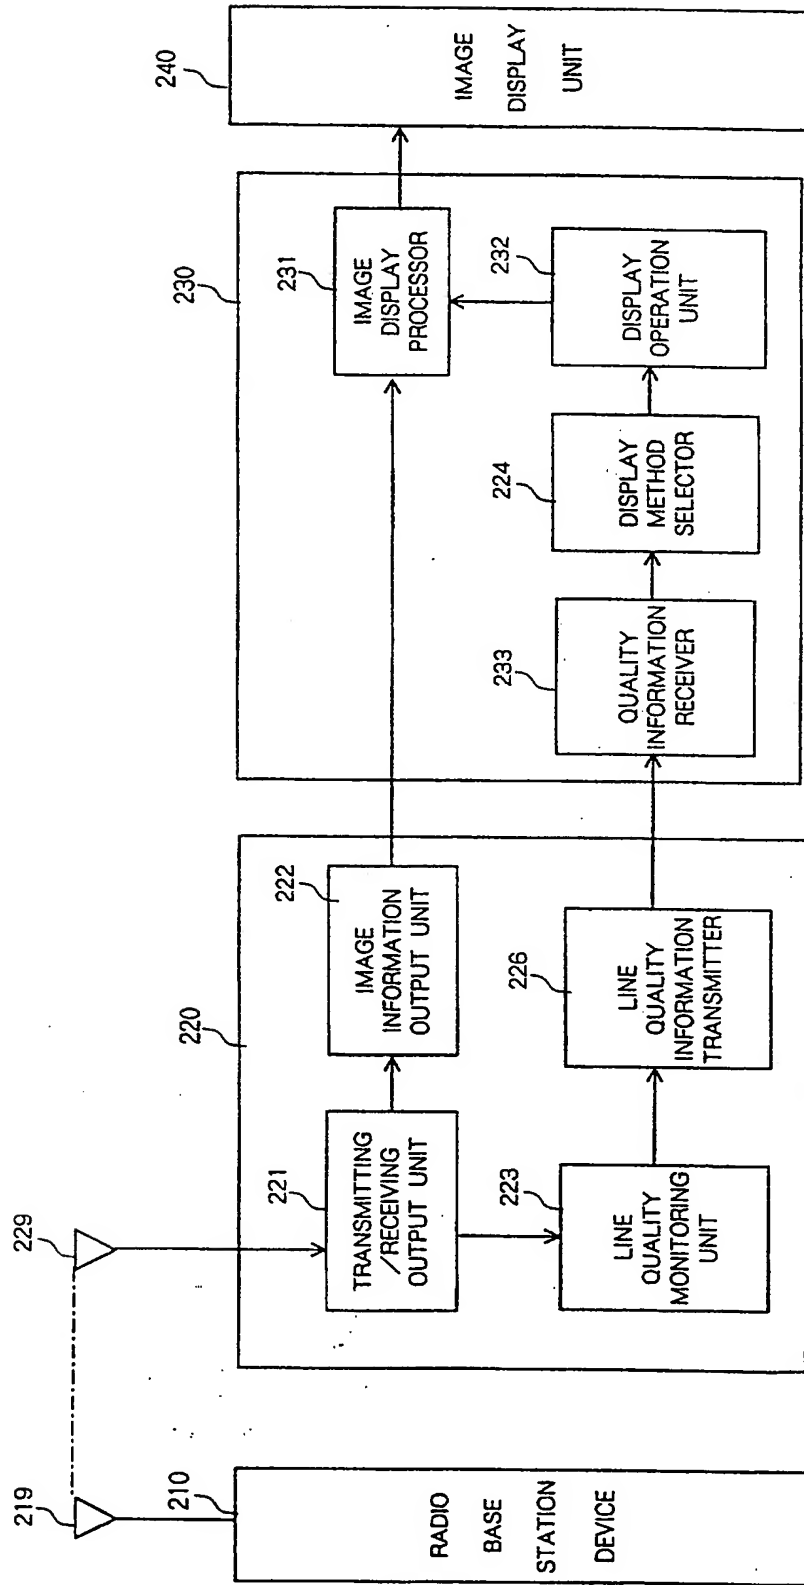


Fig. 5

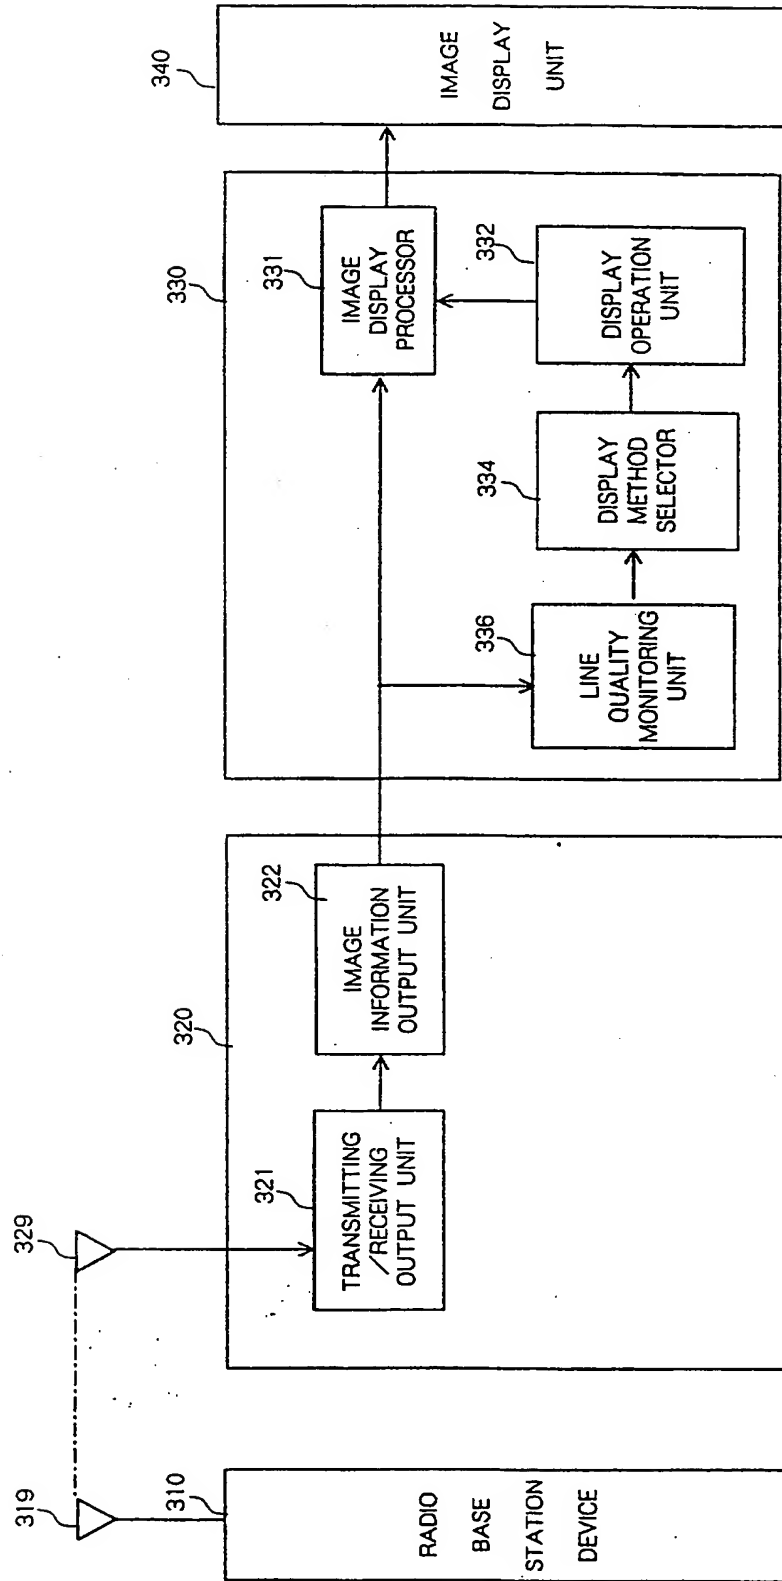
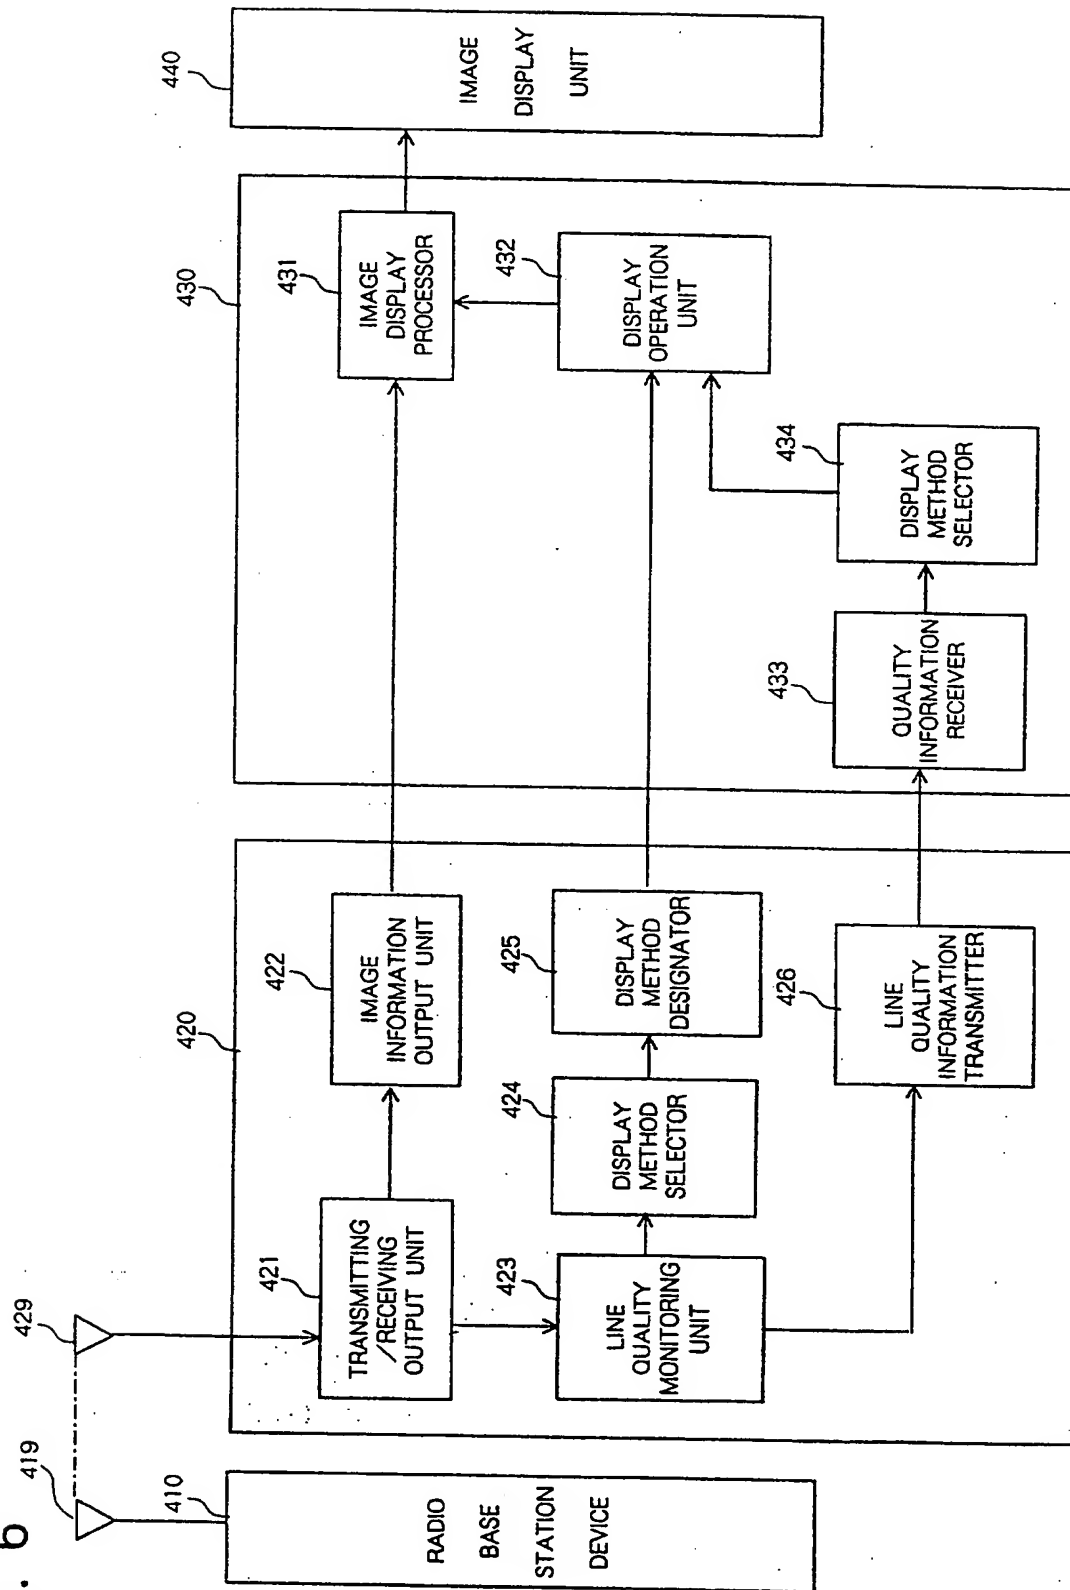


Fig. 6



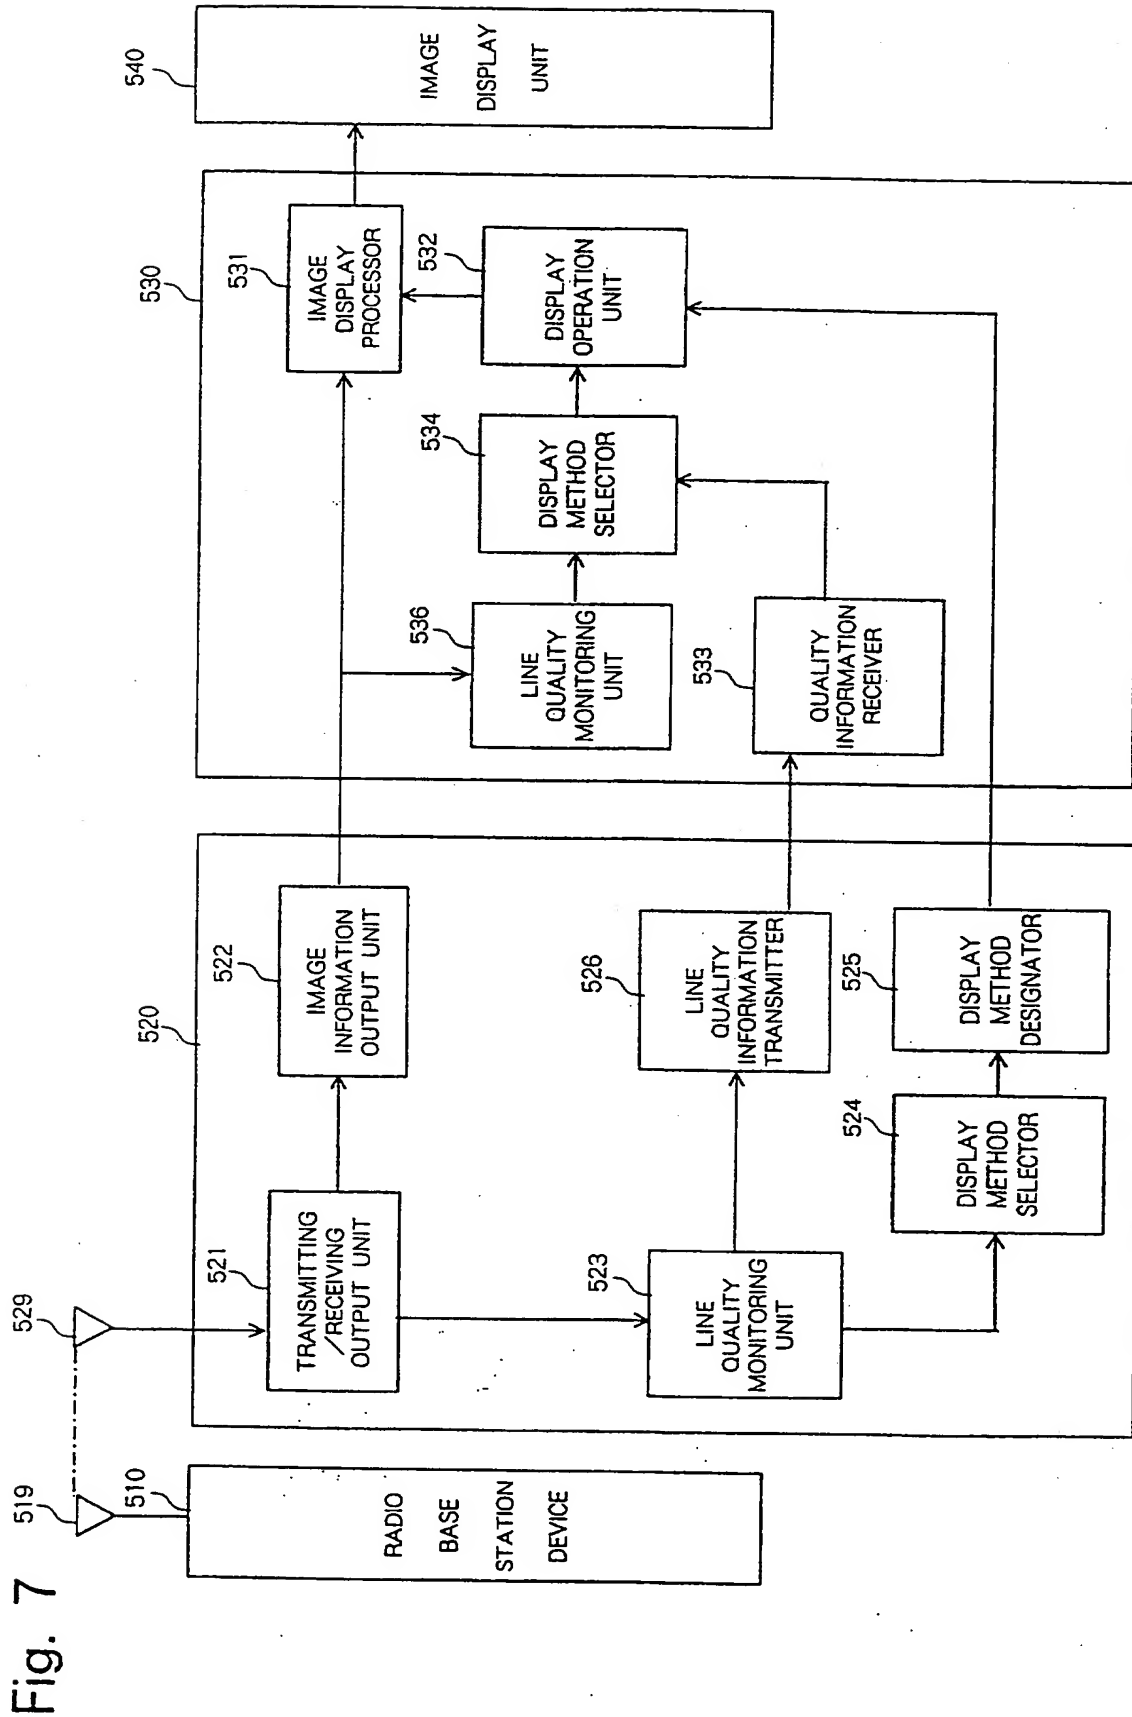


Fig. 8


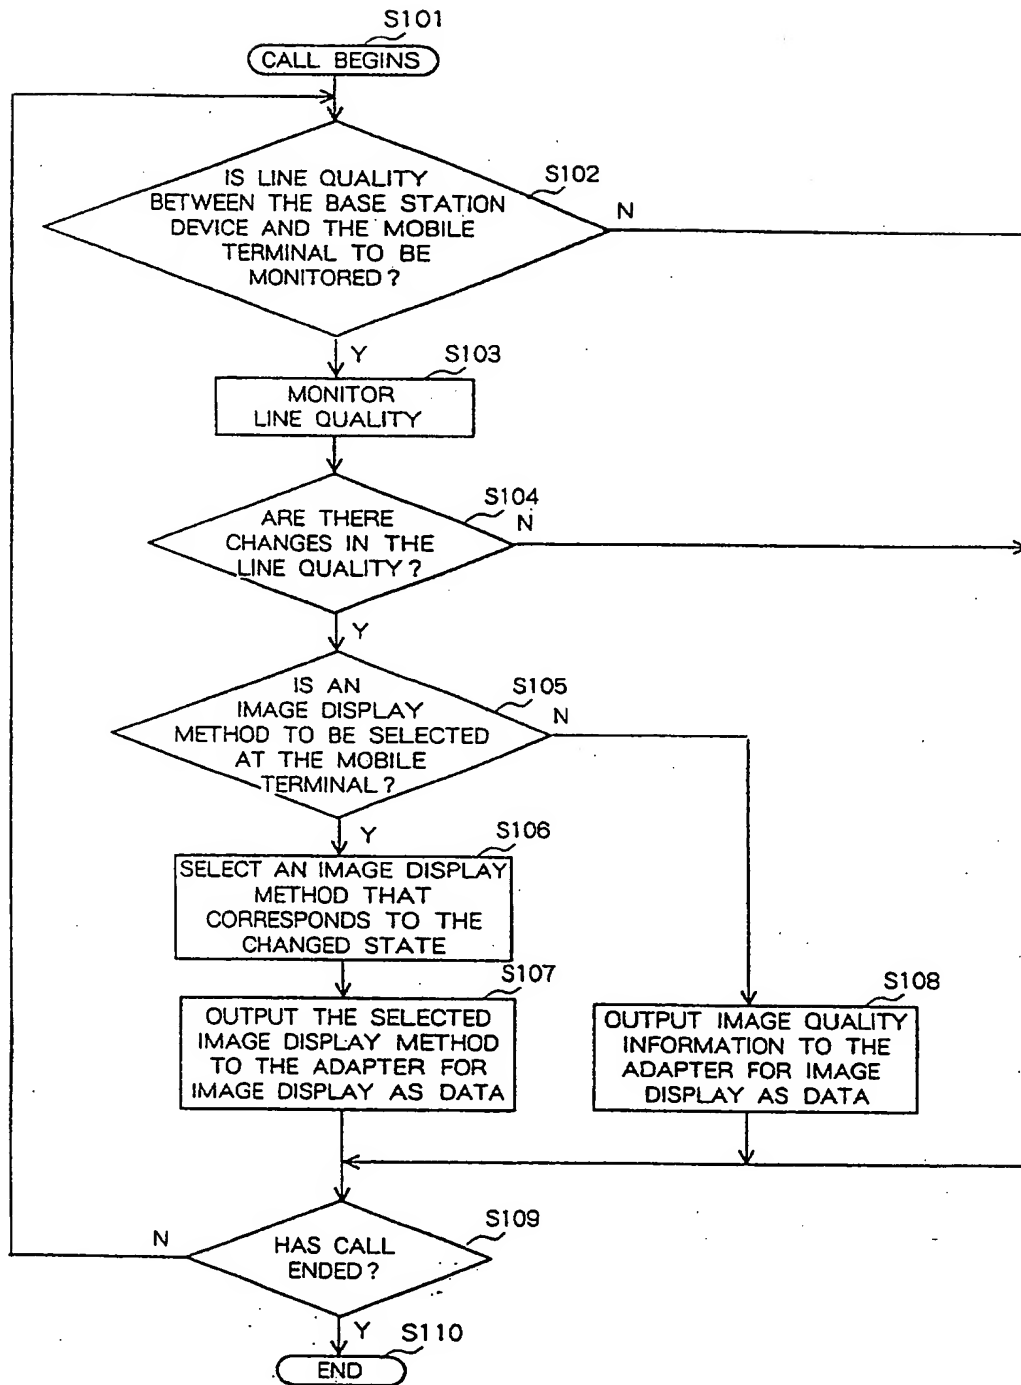




Fig. 9

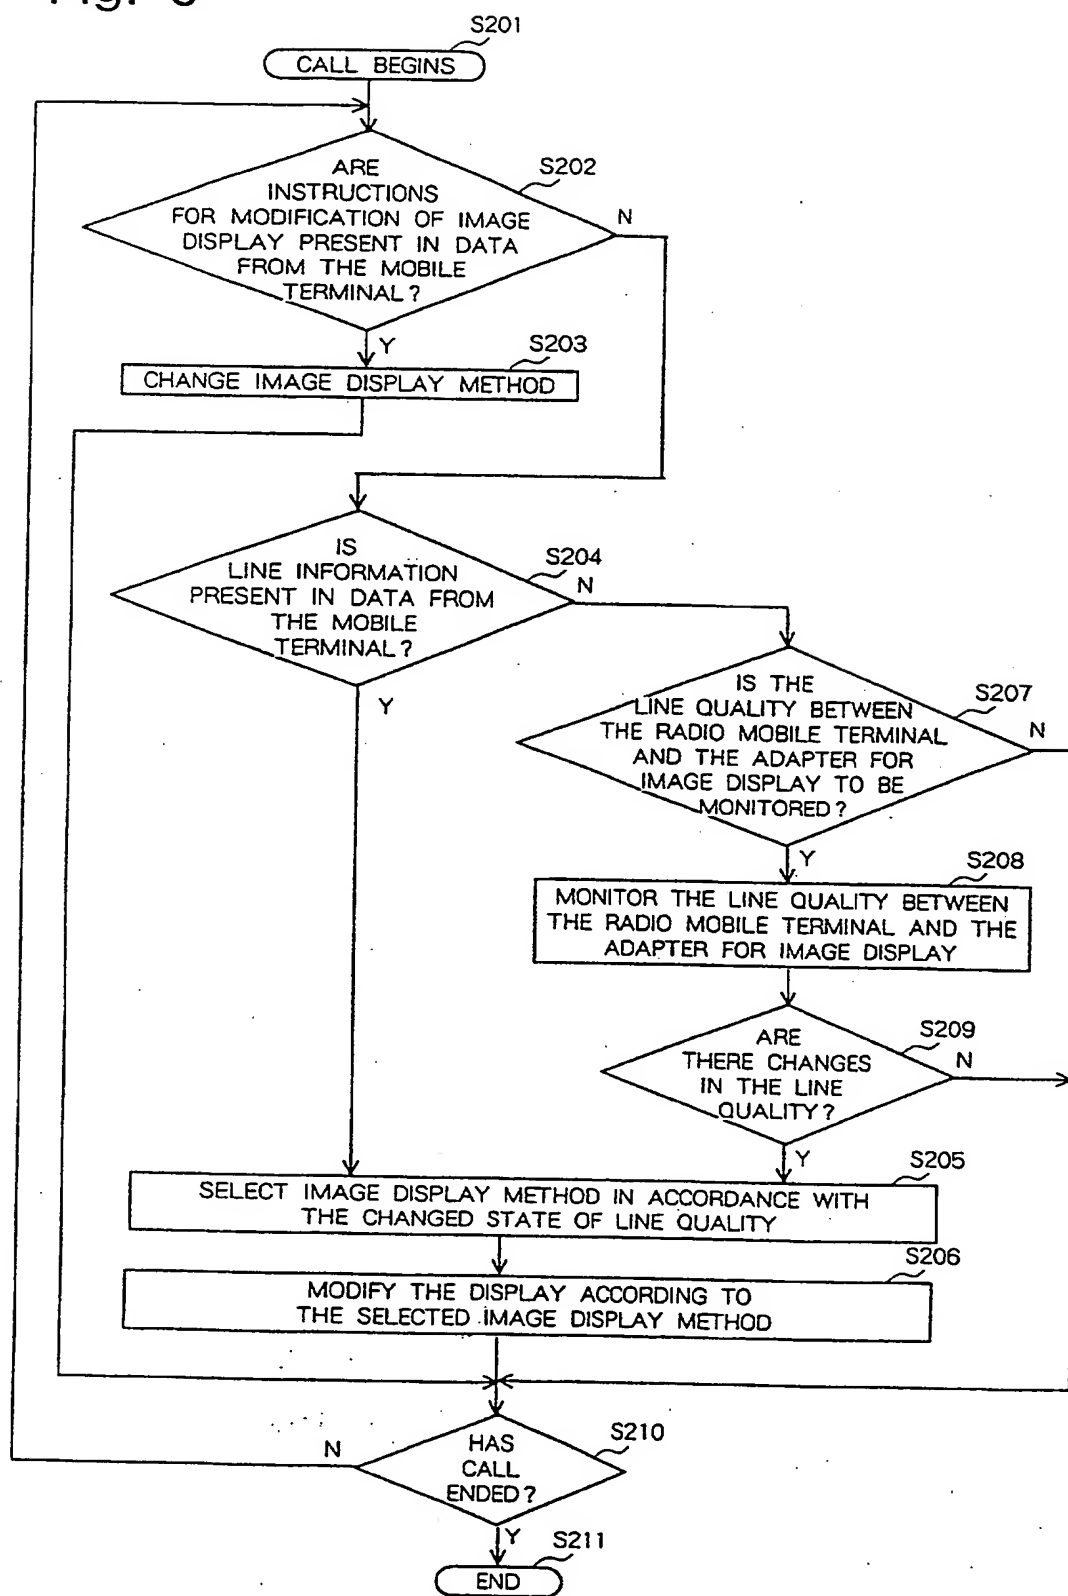

MOBILE TERMINAL EQUIPPED WITH ADAPTER FOR IMAGE DISPLAY  
AND METHOD FOR HANDLING CHANGES IN CONNECTION LINE QUALITY

BACKGROUND OF THE INVENTION

5 1. Field of the Invention:

The present invention relates to a mobile terminal equipped with an adapter for image display, and particularly to a method of displaying images that accommodates changes in the quality of a connecting line.

10 2. Description of the Related Art:

The increased liberalization of electronic communication has brought into daily use the prior-art mobile communication media which had been preferentially used in public enterprises and government and municipal  
15 offices, and moreover, the rapid popularization of car phones and portable telephones has brought about greater diversification of the content of radio mobile terminals.

As an example, transmission is no longer limited to speech but can now accommodate data and images, and image  
20 display devices that can connect to a radio mobile terminal have been put into practical use.

In contrast to a cable-connected device, however, a radio mobile terminal is in frequent motion, and the connecting line that connects to the radio base station  
25 device is therefore in a state of constant change. If an adapter for image display of an image terminal is

connected to a radio mobile terminal, degradation of the quality of the radio line can in some cases result in interruptions of the image or in the unaltered display of an image of reduced quality.

5           Similarly, in cases in which communication between a radio mobile terminal and the adapter for image display itself is realized by a means having a potential for degradation in line quality, such as a wireless connection, this degradation of line quality can result  
10 in interruptions of the image or in the unaltered display of an image of reduced quality.

#### SUMMARY OF THE INVENTION

It is an object of the present invention to provide  
15 a mobile terminal provided with an adapter for image display, that, in the event of degradation of line quality, can display an image that is improved according to the type of degradation.

A mobile terminal provided with an adapter for  
20 image display according to this invention includes a radio mobile terminal connected to a radio base station device by a radio line, an adapter for image display connected to this radio mobile terminal, and an image display unit; wherein the radio mobile terminal monitors  
25 the quality of the line between the radio base station device and the radio mobile terminal, predicts

degradation of the image produced by changes in the line quality, and communicates to the adapter for image display information relating to the manipulation of the image display content that is necessary for dealing with the predicted image degradation; and, by means of this information, the adapter for image display manipulates the image display content of the image display unit to modify it to an appropriate image display.

The selection of the appropriate image display method on the image display unit in accordance with the line quality may be performed at the radio mobile terminal, at the adapter for image display, or, by switching, at either the radio mobile terminal and the adapter for image display.

According to another embodiment, the adapter for image display monitors line quality between the mobile terminal and the adapter for image display, predicts the degradation of the image produced by changes in the line quality, and by means of information relating to the manipulation of image display content that is necessary for dealing with the predicted degradation of the image, manipulates the image display content of the image display unit to modify it to an appropriate image display.

According to yet another embodiment, a radio mobile terminal monitors the quality of the line between the

radio base station device and the radio mobile terminal,  
predicts degradation of the image produced by changes in  
the line quality, communicates to the adapter for image  
display information relating to manipulation of the image  
5 display content that is necessary for dealing with the  
predicted image degradation; and, by means of this  
information, the adapter for image display manipulates  
the image display content of the image display unit to  
modify it to an appropriate image display, and further,  
10 monitors the quality of the line between the radio mobile  
terminal and the adapter for image display, predicts  
degradation of the image caused by changes in the line  
quality, and by means of information relating to  
manipulation of the image display content that is  
15 necessary for dealing with the predicted image  
degradation, manipulates the image display content of the  
image display unit to modify it to an appropriate image  
display.

The method for dealing with changes in line quality  
20 according to this invention is a method for dealing with  
changes in line quality in a mobile terminal that is  
provided with an adapter for image display and that  
includes a radio mobile terminal that is connected to a  
radio base station device by a radio line, an adapter for  
25 image display that is connected to this radio mobile  
terminal, and an image display unit; wherein the radio

mobile terminal monitors the quality of the line between the radio base station device and the radio mobile terminal, predicts degradation of the image produced by changes in the line quality, and communicates to the adapter for image display information relating to manipulation of the image display content that is necessary for dealing with the predicted image degradation; and, by means of this information, the adapter for image display manipulates the image display content of the image display unit to modify it to an appropriate image display.

According to another embodiment, the adapter for image display monitors line quality between the mobile terminal and the adapter for image display, predicts changes in the image produced by changes in the line quality, and by means of information relating to manipulation of image display content that is necessary for dealing with the predicted degradation of the image, manipulates the image display content of the image display unit to modify it to an appropriate image display.

The present invention is a radio mobile terminal that is provided with an adapter for image display and that can monitor line quality between a radio base station device and a radio mobile terminal such as a portable telephone and insert this information in data

and transmit to an adapter for image display; an adapter  
for image display that can manipulate image display  
content based on this information; and an adapter for  
image display that can monitor line conditions in cases  
5 in which degradation of line quality between the mobile  
terminal and adapter for image display is conceivable and  
manipulate the image content based on this information;  
whereby the present invention can obtain an appropriate  
image display that deals with changes in line conditions.

10 The above and other objects, features, and  
advantages of the present invention will become apparent  
from the following description based on the accompanying  
drawings which illustrate examples of preferred  
embodiments of the present invention.

#### 15 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic diagram of a mobile  
communication system that includes a mobile terminal  
provided with an adapter for image display according to  
20 the first and second embodiments of the present  
invention.

Fig. 2 is a schematic diagram of a mobile  
communication system that includes a mobile terminal that  
is provided with an adapter for image display according  
25 to the third embodiment of the present invention.

Fig. 3 is a block diagram showing the construction

of a mobile terminal that is provided with an adapter for image display according to the first embodiment of the present invention.

Fig. 4 is a block diagram showing the construction of a mobile terminal that is provided with an adapter for image display according to the second embodiment of the present invention.

Fig. 5 is a block diagram showing the construction of a mobile terminal that is provided with an adapter for image display according to the third embodiment of the present invention.

Fig. 6 is a block diagram showing the construction of a mobile terminal that is provided with an adapter for image display according to the fourth embodiment of the present invention.

Fig. 7 is a block diagram showing the construction of a mobile terminal that is provided with an adapter for image display according to the fifth embodiment of the present invention.

Fig. 8 is a flow chart for explaining the operation of a radio mobile terminal according to the fifth embodiment of the present invention.

Fig. 9 is a flow chart for explaining the operation of the adapter for image display according to the fifth embodiment of the present invention.



## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to the accompanying figures, the embodiments of the present invention are next explained. Fig. 1 is a schematic diagram of a mobile communication system that includes a mobile terminal that is provided with an adapter for image display according to the first and second embodiments of the present invention.

The mobile communication system includes radio base station device 110, radio mobile terminal 120 that is connected to radio base station device 110 by a radio line, adapter for image display 130 that is connected to radio mobile terminal 120, and image display unit 140.

Radio mobile terminal 120, which is, for example, a portable telephone, monitors the quality of the line between radio base station device 110 and radio mobile terminal 120, predicts degradation of an image that is caused by changes in the quality of the line, inserts information relating to manipulation of the image display content that is necessary for dealing with this degradation into data and notifies adapter for image display 130, whereupon adapter for image display 130 uses this information to manipulate the image display content of image display unit 140 and modifying it to an appropriate image display.

Fig. 2 is a schematic view of a mobile communication system that includes a mobile terminal that

is provided with the adapter for image display according to the third embodiment of this invention. In contrast to the first and second embodiments, in which the line quality between radio base station device 310 and radio mobile terminal 320 is monitored, the line quality between radio mobile terminal 320 and adapter for image display 330 is monitored in the third embodiment. For example degradation in line quality between radio mobile terminal 320 and adapter for image display 330 is conceivable in the case of a wireless connection between radio mobile terminal 320 and adapter for image display 330. In such a case, line quality between radio mobile terminal 320 and adapter for image display 330 is monitored at adapter for image display 330, and to handle image degradation that can be predicted due to changes in the line quality, the image display content is manipulated to modify it to an appropriate display. This embodiment can also be applied to a case in which the base station device and mobile terminal are connected by wiring.

Referring to the figures, explanation next regards the configuration of a mobile terminal that is provided with an adapter for image display according to the first embodiment of the present invention. Fig. 3 is a block diagram showing the construction of a mobile terminal that is provided with an adapter for image display

according to the first embodiment of the present invention.

A mobile terminal provided with an adapter for image display is provided with radio mobile terminal 120,  
5 adapter for image display 130, and image display unit 140.

Radio mobile terminal 120 is provided with: antenna 129 for transmitting radiowaves to and receiving radiowaves from antenna 119 of radio base station device  
10 110; transmitting/receiving output unit 121 for reproducing voice, data, or image information from radiowaves received at antenna 129 and conversely, for generating signals from received voice, data, or images and transmitting to radio base station device 110 by way  
15 of antenna 129; image information output unit 122 for outputting image information to adapter for image display 130; line quality monitoring unit 123 for monitoring the line quality between radio base station device 110 and radio mobile terminal 120 from signals received at  
20 transmitting/receiving output unit 121; display method selector 124 for selecting the appropriate image display method in image display unit 140 according to the line quality; and display method designator 125 for outputting the selected display method to adapter for image display  
25 130.

Adapter for image display 130 is provided with:

image display processor 131 for receiving image  
information from image information output unit 122 and  
displaying an image on image display unit 140; and  
display operation unit 132 for receiving instructions  
5 from display method designator 125 and manipulating image  
display processor 131 to modify to an appropriate  
display.

The configuration and functions of  
transmitting/receiving output unit 121 is similar to a  
10 mobile terminal that is provided with an adapter for  
image display of the prior art, and detailed explanation  
is therefore here omitted.

Line quality monitoring unit 123 may employ a known  
composition or line quality monitoring method, such as  
15 CRC coding mode that detects transmission errors by  
calculating a CRC code portion that is added to data that  
are restored to a frame format.

In this case, the modification to an appropriate  
display by adapter for image display 130 refers to such  
20 operations as, instead of displaying without alteration  
an image that suffers from reduced picture quality and  
interruptions due to degradation in line quality, turning  
OFF the display, rendering the disturbance in picture  
quality less obtrusive by dimming the screen luminance,  
25 displaying information reporting line conditions, and  
restoring normal operation when line conditions recover;

the various display methods that can be selected according to the changes in line quality being stored in advance in display method selector 124.

Image display unit 140 may be structured as a  
5 single unit with adapter for image display 130 or may be independent and connected to adapter for image display 130.

The construction of a mobile terminal provided with an adapter for image display according to the second  
10 embodiment of the present invention is next described with reference to the accompanying figures. Fig. 4 is a block diagram showing the construction of a mobile terminal provided with an adapter for image display according to the second embodiment of the present  
15 invention.

A mobile terminal equipped with an adapter for image display is provided with radio mobile terminal 220, adapter for image display 230, and image display unit 240.

20 Radio mobile terminal 220 is provided with: antenna 229 for transmitting radiowaves to and receiving radiowaves from antenna 219 of radio base station device 210; transmitting/receiving output unit 221 for reproducing voice, data, or image information from  
25 radiowaves received at antenna 229 and conversely, for generating signals from received voice, data, or images

and transmitting to radio base station device 210 by way  
of antenna 229; image information output unit 222 for  
outputting image information to adapter for image display  
230; line quality monitoring unit 223 for monitoring the  
5 line quality between radio base station device 210 and  
radio mobile terminal 220 from signals received at  
transmitting/receiving output unit 221; and line quality  
information transmitter 226 for outputting line quality  
information detected at line quality monitoring unit 223  
10 to adapter for image display 230.

Adapter for image display 230 is provided with:  
image display processor 231 for receiving image  
information from image information output unit 222 and  
displaying an image on image display unit 240; quality  
15 information receiver 233 for receiving the line quality  
information from line quality information transmitter  
226; display method selector 234 for selecting an  
appropriate image display method for image display unit  
240 according to line quality; display operation unit 232  
20 for operating image display processor 231 to modify to an  
appropriate display according to the selected display  
method.

Although the selection of an appropriate image  
display method was carried out by radio mobile terminal  
25 120 in the first embodiment, this selection is carried  
out at adapter for image display 230 in the second

embodiment. The construction and functions are otherwise the same as the first embodiment, and redundant explanation is therefore omitted here.

5 Explanation next regards a mobile terminal provided with an adapter for image display according to the third embodiment of the present invention with reference to the accompanying figures. Fig. 5 is a block diagram showing the configuration of a mobile terminal provided with the adapter for image display of the third embodiment of the  
10 present invention.

The mobile terminal provided with the adapter for image display includes radio mobile terminal 320, adapter for image display 330, and image display unit 340.

15 Radio mobile terminal 320 is provided with: antenna 329 for transmitting radiowaves to and receiving radiowaves from antenna 319 of radio base station device 310; transmitting/receiving output unit 321 for reproducing voice, data, and image information from radiowaves received at antenna 329 and, conversely,  
20 generating signals from received voice, data, and images and transmitting to radio base station device 310 by way of antenna 329; and image information output unit 322 for outputting image information to adapter for image display 330.

25 Adapter for image display 330 is provided with: image display processor 331 for receiving image

information from image information output unit 322 and displaying an image on image display unit 340; line quality monitoring unit 336 for connecting to the line that joins image information output unit 322 and image display processor 331 and then monitoring the quality of the line between image information output unit 322 and image display processor 331 based on the received signals; display method selector 334 for selecting the appropriate image display method in image display unit 340 according to the line quality information detected at line quality monitoring unit 336; and display operation unit 332 for operating image display processor 331 to modify to an appropriate display in accordance with the selected display method.

Although the line condition between radio base station device 310 and radio mobile terminal 320 was monitored in the first embodiment and the second embodiment, in the third embodiment, the line condition between radio mobile terminal 320 and adapter for image display 330 is monitored, and the display in image display unit 340 is manipulated according to the appropriate image display method depending on the line quality information. The construction and functions of this embodiment are otherwise the same as that of the first embodiment, and further explanation is therefore omitted here.



In these examples, the mobile terminal has been assumed to be a radio terminal. However, in a case in which the line as far as the mobile terminal is resistant to line degradation but line quality between the mobile  
5 terminal and the adapter for image display is prone to degradation, such as in an adapter for image display that is radio-connected to a cable-connected terminal, the line quality between adapter and terminal may be monitored and modification to an appropriate display  
10 carried out in the adapter for image display.

The construction of a mobile terminal provided with an adapter for image display according to the fourth embodiment of the present invention is next explained with reference to the accompanying figures. Fig. 6 is a  
15 block diagram showing the construction of a mobile terminal provided with an adapter for image display according to the fourth embodiment of the present invention.

The mobile terminal provided with an adapter for  
20 image display includes radio mobile terminal 420, adapter for image display 430, and image display unit 440.

Radio mobile terminal 420 is provided with: antenna  
429 for transmitting radiowaves to and receiving  
radiowaves from antenna 419 of radio base station device  
25 410; transmitting/receiving output unit 421 for reproducing voice, data, and image information from

radiowaves received at antenna 429 and conversely, for  
generating signals from received voice, data, and images  
and transmitting to radio base station device 410 by way  
of antenna 429; image information output unit 422 for  
5 outputting image information to adapter for image display  
430; line quality monitoring unit 423 for monitoring the  
line quality between radio base station device 410 and  
radio mobile terminal 420 based on signals received at  
transmitting/receiving output unit 421; display method  
10 selector 424 for selecting the appropriate image display  
method in image display unit 440 in accordance with the  
line quality; display method designator 425 for  
outputting the selected display method to adapter for  
image display 430; and line quality information  
15 transmitter 426 for outputting line quality information  
detected at line quality monitoring unit 423 to adapter  
for image display 430.

Adapter for image display 430 is provided with:  
image display processor 431 for receiving image  
20 information from image information output unit 422 and  
displaying an image on image display unit 440; quality  
information receiver 433 for receiving line quality  
information from line quality information transmitter  
426; display method selector 434 for selecting the  
25 appropriate image display method in image display unit  
440 according to the line quality; and display operator

432 for receiving instructions from display method selector 434 or display method designator 425 and causing image display processor 431 to modify to the appropriate display in accordance with the selected display method.

5           The fourth embodiment is a form that combines the first embodiment and the second embodiment, and allows the selection of the display method to be performed at radio mobile terminal 420 or at adapter for image display 430 depending on the functions of adapter for image display 430 that is connected. This embodiment is effective in cases in which a variety of different adapters for image display 430 are connected to radio mobile terminal 420.

15           Explanation is next presented with reference to the accompanying figures regarding the construction of a mobile terminal provided with an adapter for image display according to the fifth embodiment of the present invention. Fig. 7 is a block diagram showing the construction of a mobile terminal provided with an adapter for image display according to the fifth embodiment of the present invention.

20           The mobile terminal provided with an adapter for image display includes radio mobile terminal 520, adapter for image display 530, and image display unit 540.

25           Radio mobile terminal 520 is provided with: antenna 529 for transmitting radiowaves to and receiving

radiowaves from antenna 519 of radio base station device 510; transmitting/receiving output unit 521 for reproducing voice, data, and image information from radiowaves received at antenna 529 and conversely, for  
5 generating signals from received voice, data, and images and transmitting to radio base station device 510 by way of antenna 529; image information output unit 522 for outputting image information to adapter for image display 530; line quality monitoring unit 523 for monitoring the  
10 line quality between radio base station device 510 and radio mobile terminal 520 based on signals received at transmitting/receiving output unit 521; display method selector 524 for selecting the appropriate image display method in image display unit 540 according to the line  
15 quality; display method designator 525 for outputting the selected display method to adapter for image display 530; and line quality information transmitter 526 for outputting line quality information detected at line quality monitoring unit 523 to adapter for image display  
20 530.

Adapter for image display 530 is provided with:  
image display processor 531 for receiving image  
information from image information output unit 522 and  
displaying an image on image display unit 540; quality  
25 information receiver 533 for receiving line quality  
information from line quality information transmitter

526; line quality monitoring unit 536 for connecting to  
the line joining image information output unit 522 and  
image display processor 531 and monitoring the line  
quality between image information output unit 522 and  
5 image display processor 531 based on the received  
signals; display method selector 534 for selecting the  
appropriate image display method in image display unit  
540 in accordance with the line quality information  
received at quality information receiver 533 or the line  
10 quality information detected at line quality monitoring  
unit 536; and display operator 532 for causing image  
display processor 531 to change to the appropriate  
display in accordance with the display method that was  
selected at display method selector 524 or at display  
15 method selector 534.

The fifth embodiment is a combination of the first  
embodiment, second embodiment, and third embodiment. This  
embodiment enables both monitoring of line quality  
between radio base station device 510 and radio mobile  
20 terminal 520 and monitoring of line quality between radio  
mobile terminal 520 and adapter for image display 530,  
and further, in monitoring the line quality between radio  
base station device 510 and radio mobile terminal 520,  
allows the selection of the display method to be  
25 performed at either radio mobile terminal 520 or at  
adapter for image display 530, depending on the functions

of adapter for image display 530 that is connected.

As described in the foregoing explanation, in the fifth embodiment, the line quality between the radio base station device and the radio mobile terminal is monitored, either line quality information or information directing display modification according to the line quality is sent to the adapter for image display, and based on this information, the adapter for image display operates to modify to the appropriate display.

In cases in which the adapter for image display is connected by a means that is prone to line quality degradation, such as by a wireless connection, the line quality between the radio mobile terminal and the adapter for image display is monitored, and depending on the line conditions, the adapter for image display operates to modify to an appropriate display.

The "modification to appropriate display by the adapter for image display" signifies that, instead of displaying without alteration an image that suffers from interruptions or reduced picture quality due to degradation in line quality as described hereinabove, operations are carried out such as turning OFF the display, reducing screen luminance to make disruption of image quality less apparent, displaying information that reports line conditions, and then restoring normal operation upon recovery of line conditions.

The adapter for image display has the function of selecting the appropriate operation based on line condition information either when monitoring line quality or when line condition information data are sent in. In addition, this construction allows the switching among the operations that are to be carried out to be set at either the adapter for image display or radio mobile terminal.

Although the fifth embodiment allows the selection of the display method to be performed at either the radio mobile terminal or at the adapter for image display, selection may be carried out at only one site.

Explanation is next presented with reference to the accompanying figures regarding the operation of a mobile terminal that is provided with an adapter for image display with the fifth embodiment as an example. The operation of each of the first to fourth embodiments is included in that of the fifth embodiment, and individual explanation is therefore omitted.

Fig. 8 is a flow chart for explaining the operation of the radio mobile terminal according to the fifth embodiment of the present invention, and Fig. 9 is a flow chart for explaining the operation of the adapter for image display according to the fifth embodiment of the present invention.

In the radio mobile terminal, when a call begins

(S101), it is first verified whether line quality between the radio base station device and radio mobile terminal is to be monitored (S102), and if line quality monitoring between the radio base station device and the radio  
5 mobile terminal is selected (S102Y), line quality monitoring between the radio base station device and the radio mobile terminal is performed (S103). If a change occurs in the line quality (S104Y), it is then verified whether selection of the image display method is to be  
10 carried out at the radio mobile terminal (S105), and if selection of the image display method is to be carried out at the radio mobile terminal (S105Y), an image display method is selected that corresponds to the changed state of the line quality (S106) and the selected  
15 image display method is outputted to the adapter for image display as data (S107). If the call has not ended (S109N), the process returns to Step S102 and the operation is repeated. If the call has ended (S109Y), the process is terminated (S110).

20 If the selection of the image display method is not to be performed in the radio mobile terminal (S105N), image quality information is outputted to the adapter for image display (S108). If the call has not ended (S109N), the process returns to Step S102 and the operation is  
25 repeated. If the call has ended (S109Y), the process is terminated (S110).



If line quality monitoring between the radio base station device and the mobile terminal is not selected (S102N), the process proceeds to Step S109, and if the call has not ended (S109N), the process returns to Step S102 and the operation is repeated. If the call has ended (S109Y), the process is terminated (S110).

If there is no change in the line quality (S104Y), the process proceeds to Step S109, and if the call has not ended (S109N), the process returns to Step S102 and the operation is repeated. If the call has ended (S109Y), the process is terminated (S110).

The radio mobile terminal monitors the line quality between the radio base station device and the radio mobile terminal, and outputs to the adapter for image display data designating the appropriate display according to the line conditions. In a case in which the line conditions deteriorate, depending on the line conditions, data designating such operations as turning off the display, reducing the luminance, or displaying line condition information, or alternatively, data reporting the line condition, are sent to the adapter for image display. When the line conditions recover, data that can restore the adapter for image display to normal operation are sent.

In the adapter for image display, when a call begins (S201), it is first verified whether instructions

to modify the image display are present in data from the radio mobile terminal (S202). If there are image display modification instructions (S202Y), the image display method is modified in accordance with the instructions (S203), and if the call has not ended (S210N), the process returns to Step S202 and the operation is repeated. If the call has ended (S210Y), the process is terminated (S211).

If there are no instructions to modify image display in the data from the radio mobile terminal (S202N), it is next verified whether line information is included in the data from the radio mobile terminal (S204). If there is line information (S204Y), an image display method is selected that corresponds to the changed state of the line quality (S205), and the display is modified according to the selected image display method (S206). If the call has not ended (S210N), the process returns to Step S202 and the operation is repeated. If the call has ended (S210Y), the process is terminated (S211).

If there is no line information in the data from the radio mobile terminal (S204N), it is next verified whether line quality is to be monitored between the radio mobile terminal and the adapter for image display (S207).

If line quality is to be monitored between the radio mobile terminal and the adapter for image display

(S207Y), the line quality is monitored between the radio mobile terminal and the adapter for image display (S208). If a change should occur in the line quality (S209Y), an image display method is selected according to the state of change of the line quality (S205), and the display is modified according to the selected image display method (S206). If the call has not ended (S210N), the process returns to Step S202 and the operation is repeated, and if the call has ended (S210Y), the process is terminated (S211). If line quality between the radio mobile terminal and the adapter for image display is not to be monitored (S207N) or if there is no change in line quality (S209N), the process returns to Step S210. If the call has not ended (S210N), the process returns to Step S202 and the operation is repeated, and if the call has ended (S210Y), the process is terminated (S211).

If instructions to modify the display are contained in data received from the radio mobile terminal, display is outputted in accordance with the instructions. If the line conditions are to be reported, an appropriate display according to the line conditions is outputted. The unaltered display of an image of reduced quality (such as interruptions of the picture or disturbances in picture quality) can be avoided by, for example, turning OFF the display, reducing luminance, or displaying the conditions.

If the radio mobile terminal and the adapter for image display are connected such that there exists a possibility of degradation in line quality, such as a wireless connection, the adapter for image display monitors the line quality, judges the line conditions, and operates to produce an appropriate display.

Alternatively, if a possibility for degradation in line quality exists between the terminal and the adapter for image display, such as in a case in which an adapter for image display is radio-connected to a cable-connected terminal, the adapter for image display monitors the line quality and operation is carried out at the adapter for image display to modify to an appropriate display.

The judgment of the line quality between the adapter for image display and the radio mobile terminal or the above-described cable-connected terminal need not be carried out at the adapter for image display as in the third and fifth embodiments. Instead, the radio mobile terminal or the cable-connected terminal can monitor and judge conditions, and this information can be inserted into data to the adapter for image display.

As described hereinabove, the present invention monitors line quality between a base station device and a mobile terminal or between a mobile terminal and an adapter for image display, and in the event of degradation of line quality, causes the adapter for image

display to perform appropriate display (such as turning  
off the display, reducing luminance, or displaying line  
quality information). As a result, the present invention  
has the effect of avoiding the unaltered display of an  
5 image that suffers from reduced quality (such as  
interruptions of the image or disturbances of picture  
quality) that may occur as a result of degradation in  
line quality.

10 It is to be understood, however, that although the  
characteristics and advantages of the present invention  
have been set forth in the foregoing description, the  
disclosure is illustrative only, and changes may be made  
in the arrangement of the parts within the scope of the  
appended claims.

## CLAIMS

1. A mobile terminal provided with an adapter for image display and that includes a radio mobile terminal that is connected to a radio base station device by a radio line, an adapter for image display that is  
5 connected to said radio mobile terminal, and an image display unit, wherein:

said radio mobile terminal monitors the quality of the line between said radio base station device and the radio mobile terminal, and communicates to said adapter  
10 for image display information relating to manipulation of the image display content that is necessary for dealing with image degradation that can be predicted to occur due to changes in the line quality; and

said adapter for image display, by means of this  
15 information, manipulates the image display content of said image display unit to modify it to an appropriate image display..

2. A mobile terminal provided with an adapter for image display according to claim 1 wherein:

said radio mobile terminal comprises: an antenna for transmitting radiowaves to and receiving radiowaves  
5 from an antenna of said radio base station device; a transmitting/receiving output unit for reproducing voice, data, and image information from radiowaves received at

said antenna, and conversely, for generating signals from received voice, data, and images and transmitting to said radio base station device by way of said antenna; an  
10 image information output unit for outputting image information to said adapter for image display; a line quality monitoring unit for monitoring line quality between said radio base station device and said radio  
15 mobile terminal based on signals received at said transmitting/receiving output unit; a display method selector for selecting an appropriate image display method on said image display unit according to line quality; and a display method designator for outputting  
20 the selected display method to said adapter for image display; and

said adapter for image display comprises: an image display processor for receiving image information from said image information output unit and displaying an  
25 image on said image display unit; and a display operation unit for receiving instructions from said display method designator and operating said image display processor to modify to an appropriate display.

3. A mobile terminal provided with an adapter for image display according to claim 1 wherein:

said radio mobile terminal comprises: an antenna for transmitting radiowaves to and receiving radiowaves

5 from an antenna of said radio base station device; a  
transmitting/receiving output unit for reproducing voice,  
data, and image information from radiowaves received at  
said antenna, and conversely, for generating signals from  
received voice, data, and images and transmitting to said  
10 radio base station device by way of said antenna; an  
image information output unit for outputting image  
information to said adapter for image display; a line  
quality monitoring unit for monitoring line quality  
between said radio base station device and said radio  
15 mobile terminal based on signals received at said  
transmitting/receiving output unit; and a line quality  
information transmitter for outputting line quality  
information that was detected at said line quality  
monitoring device to said adapter for image display; and  
20 said adapter for image display comprises: an image  
display processor for receiving image information from  
said image information output unit and displaying an  
image on said image display unit; a quality information  
receiver for receiving line quality information from said  
25 line quality information transmitter; a display method  
selector for selecting an appropriate image display  
method on said image display unit according to line  
quality; and a display operation unit for operating said  
image display processor to modify to an appropriate  
30 display in accordance with the selected display method.



4. A mobile terminal provided with an adapter for image display according to claim 1 wherein:  
said radio mobile terminal comprises: an antenna for transmitting radiowaves to and receiving radiowaves from an antenna of said radio base station device; a transmitting/receiving output unit for reproducing voice, data, and image information from radiowaves received at said antenna, and conversely, for generating signals from received voice, data, and images and transmitting to said radio base station device by way of said antenna; an image information output unit for outputting image information to said adapter for image display; a line quality monitoring unit for monitoring line quality between said radio base station device and said radio mobile terminal based on signals received at said transmitting/receiving output unit; a display method selector for selecting an appropriate image display method on said image display unit according to line quality; a display method designator for outputting the selected display method to said adapter for image display; and a line quality information transmitter for outputting line quality information detected at said line quality monitoring unit to said adapter for image display; and

said adapter for image display comprises: an image

display processor for receiving image information from  
said image information output unit and displaying an  
image on said image display unit; a quality information  
receiver for receiving line quality information from said  
30 line quality information transmitter; a display method  
selector for selecting an appropriate image display  
method on said image display unit according to line  
quality; and a display operation unit for receiving  
instructions from either of said display method selector  
35 and said display method designator and operating said  
image display processor to modify to an appropriate  
display.

5. A mobile terminal provided with an adapter for  
image display and that includes a mobile terminal that is  
connected to a base station device by a line, an adapter  
for image display that is connected to said mobile  
5 terminal, and an image display unit, wherein:

said adapter for image display monitors line  
quality between said mobile terminal and the adapter for  
image display, and, in accordance with information  
relating to manipulation of the image display content  
10 that is necessary for dealing with image degradation that  
can be predicted to occur due to changes in the line  
quality, manipulates the image display content of said  
image display unit to modify it to an appropriate image

display.

6. A mobile terminal provided with an adapter for image display according to claim 5, wherein:

said adapter for image display comprises: an image display processor for receiving image information from said mobile terminal and displaying an image on said image display unit; a line quality monitoring unit that connects to the line that joins said mobile terminal and said image display processor and that monitors line quality between said mobile terminal and said image display processor based on received signals; a display method selector for selecting an appropriate image display method on said image display unit in accordance with line quality information detected at said line quality monitoring unit; and a display operation unit for operating said image display processor to modify to an appropriate display in accordance with the selected display method.

7. A mobile terminal provided with an adapter for image display and that includes a radio mobile terminal that is connected with a radio base station device by a radio line, an adapter for image display that is connected to the radio mobile terminal, and an image display unit; wherein:

said radio mobile terminal monitors the quality of the line between said radio base station device and the radio mobile terminal, and communicates to said adapter for  
10 image display information relating to manipulation of the image display content that is necessary for dealing with image degradation that can be predicted to occur due to changes in the line quality; and

said adapter for image display, by means of this  
15 information, both manipulates the image display content of said image display unit to modify it to an appropriate image display, and monitors line quality between said radio mobile terminal and the adapter for image display, and, by means of information relating to operation of the  
20 image display content that is necessary for dealing with image degradation that can be predicted to occur due to changes in line quality, manipulates the image display content of said image display unit and modifies it to an appropriate image display.

8. A mobile terminal provided with an adapter for image display according to claim 7, wherein:

said radio mobile terminal comprises: an antenna for transmitting radiowaves to and receiving radiowaves  
5 from an antenna of said radio base station device; a transmitting/receiving output unit for reproducing voice, data, and image information from radiowaves received at

said antenna, and conversely, for generating signals from received voice, data, and images and transmitting to said radio base station device by way of said antenna; an image information output unit for outputting image information to said adapter for image display; a line quality monitoring unit for monitoring line quality between said radio base station device and said radio mobile terminal based on signals received at said transmitting/receiving output unit; a display method selector for selecting an appropriate image display method on said image display unit according to line quality; a display method designator for outputting the selected display method to said adapter for image display; and a line quality information transmitter for outputting line quality information that was detected at said line quality monitoring unit to said adapter for image display; and

said adapter for image display comprises: an image display processor for receiving image information from said image information output unit and displaying an image on said image display unit; a quality information receiver for receiving line quality information from said line quality information transmitter; a line quality monitoring unit that connects to the line that joins said image information output unit and said image display processor for monitoring the line quality between said

image information output unit and said image display  
35 processor based on received signals; a display method  
selector for selecting an appropriate image display  
method on said image display unit according to either of  
line quality information received at said quality  
information receiver or line quality information that is  
40 detected at said line quality monitoring unit and a  
display operation unit for operating said image display  
processor to modify to an appropriate display according  
to either of the selected display method or the  
instructions of said display method designator.

9. A method of handling change in line quality in  
a mobile terminal that is provided with an adapter for  
image display and that includes a radio mobile terminal  
that is connected to a radio base station device by a  
5 radio line; an adapter for image display that is  
connected to said radio mobile terminal, and an image  
display unit; wherein:

said radio mobile terminal monitors line quality  
between said radio base station device and the radio  
10 mobile terminal, and communicates to said adapter for  
image display information relating to manipulation of the  
image display content that is necessary for dealing with  
image degradation that can be predicted to occur due to  
changes in the line quality; and

15           said adapter for image display, by means of this  
information, manipulates the image display content of  
said image display unit to modify it to an appropriate  
image display.

10.   A method of handling change in line quality in  
a mobile terminal that is provided with an adapter for  
image display and that includes a mobile terminal that is  
connected to a base station device by a line; an adapter  
5   for image display that is connected to the mobile  
terminal, and an image display unit; wherein:

          said adapter for image display monitors line  
quality between said mobile terminal and the adapter for  
image display, and by means of information relating to  
10   manipulation of the image display content that is  
necessary for dealing with image degradation that can be  
predicted to occur due to changes in the line quality,  
manipulates the image display content of said image  
display unit to modify it to an appropriate image  
15   display.

11. A mobile terminal substantially as any of the  
embodiments herein described with reference to the  
drawings.

12. A method of handling change in line quality in  
5 a mobile terminal, substantially as any of the embodiments  
herein described with reference to the drawings.





INVESTOR IN PEOPLE

Application No: GB 0011694.7  
Claims searched: 1 to 10

Examiner: Jared Stokes  
Date of search: 23 November 2000

## Patents Act 1977 Search Report under Section 17

### Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.R): H4F (FHC)  
H4L (LESF, LEUF)

Int Cl (Ed.7): H40M (1/725)  
H04N (1/42, 5/44, 5/94, 17/04)  
H04Q (7/32)

Other: On-Line - EPODOC, JAPIO, WPI

### Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
A	DE 19739897 A (Becker) See WPI abstract accession No. 1999-255644	-

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.